




Flanged Ball Valves

**FEATURES:**

- Anti-static Devices For Ball- Stem- Body
- Blow-out Proof Stem
- Pressure Balance Hole In Ball Slot
- Using Dewaxing Precision Casting

**STANDARDS:**

- Design: ASME B16.34
- Wall Thickness: ASME B16.34
- Fire Safe: API 607 ISO 10497
- Face to Face: ASME B 16.10
- End Flange: ASME B16.5
- Inspection & Testing: API 598

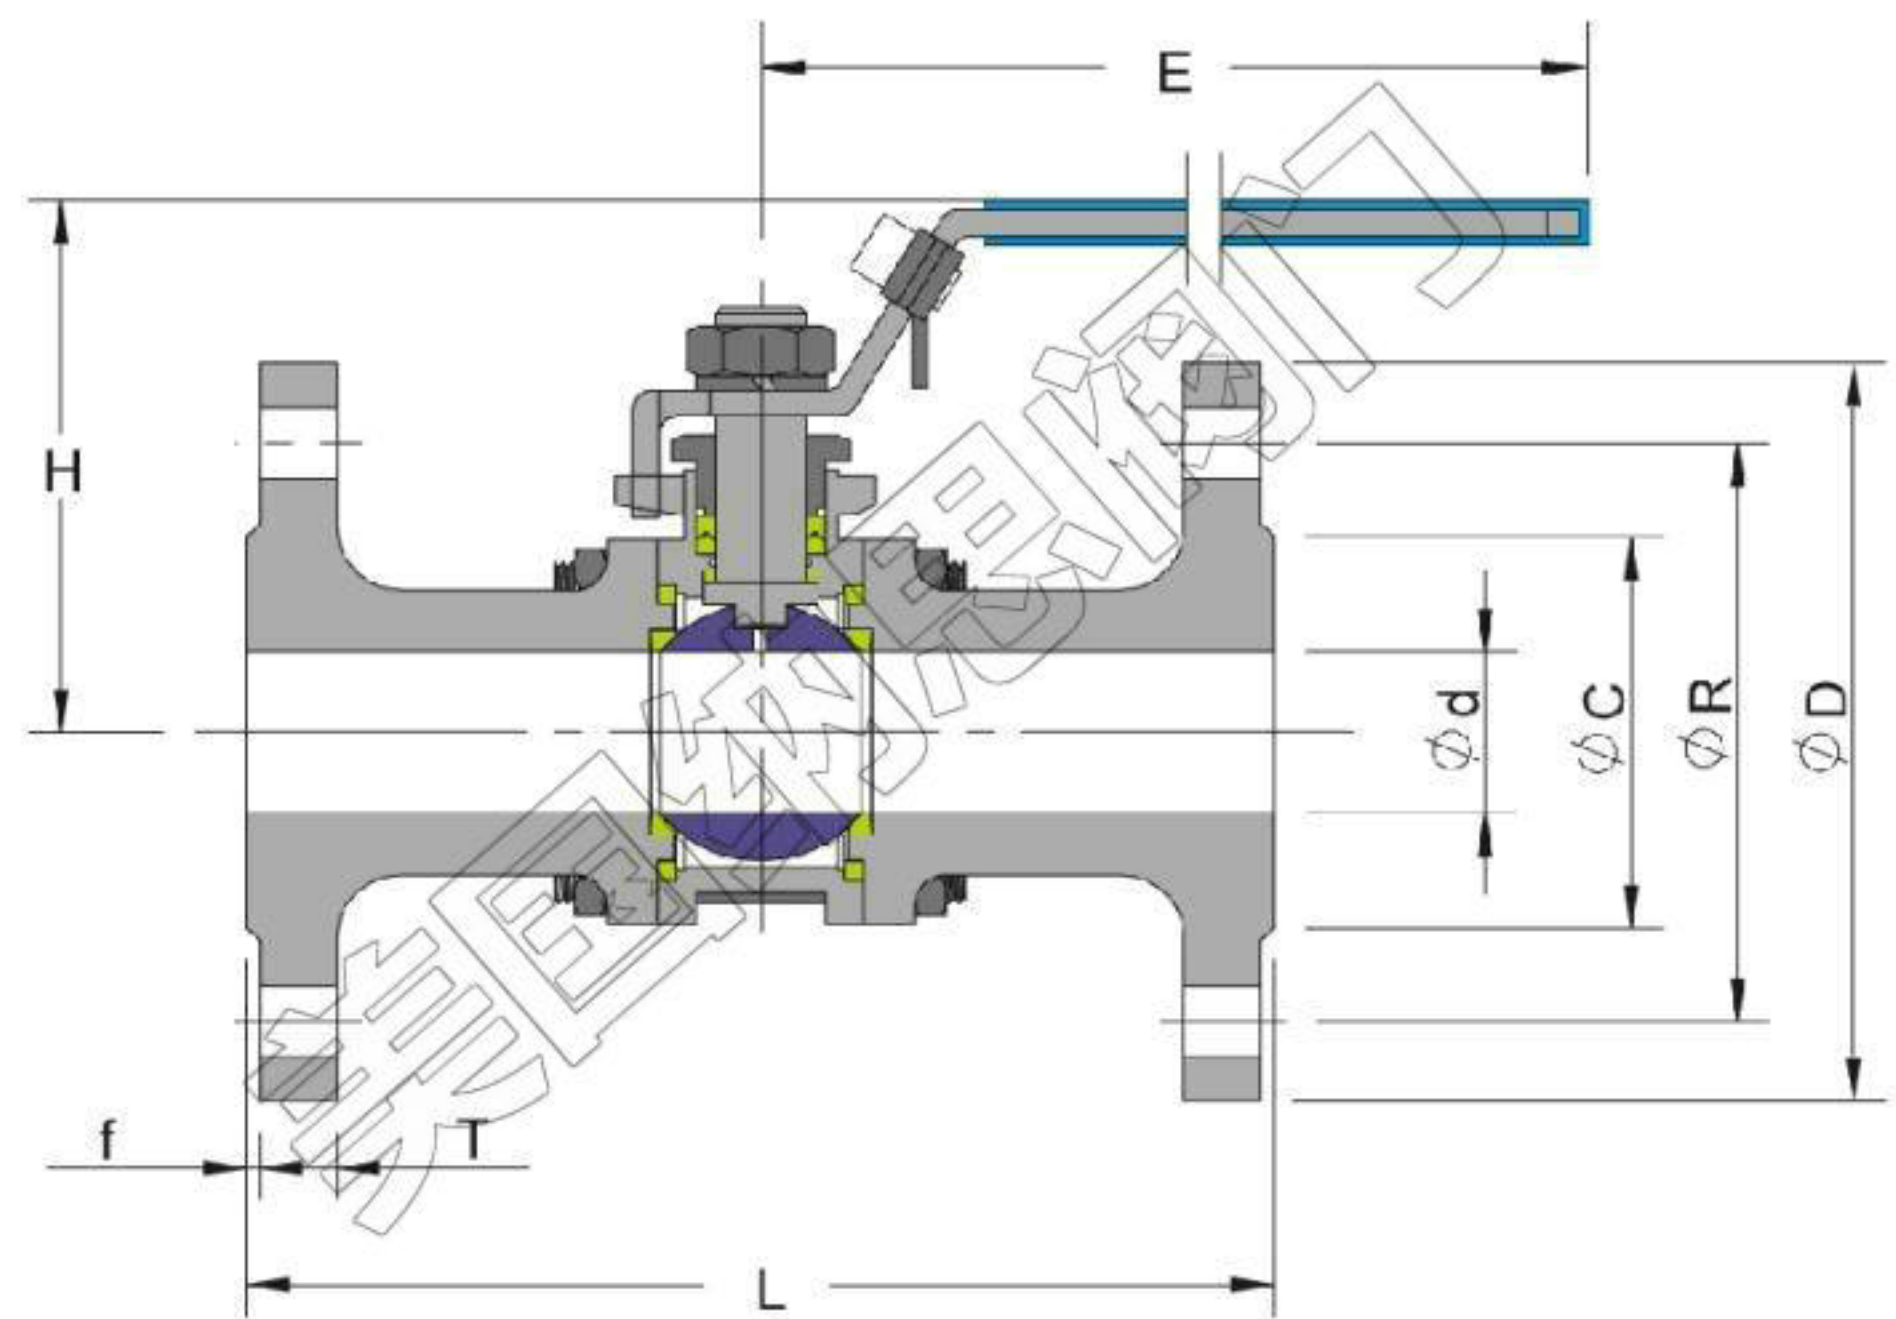

Unit:mm ■ ASME 300LBS

Size	(LBS)	L	Ød	ØC	Ø R	ØD	H	E	T	f
1/2"	300	140	15	34.9	66.7	95	76.5	160	14.3	2
3/4"	300	152	20	42.9	82.6	115	89	160	15.9	2
1"	300	165	25	50.8	88.9	128	91.5	180	17.5	2
1-1/4"	300	178	32	63.5	98.4	135	96.5	180	19.1	2
1-1/2"	300	190	38	73	114.3	155	111	220	20.7	2
2"	300	216	48	92.1	127	165	120	220	22.3	2
2-1/2"	300	241	65	104.8	149.2	190	145	280	25.4	2
3"	300	282	76	127	168.3	210	155.5	280	28.6	2
4"	300	305	100	157.2	200	255	168	300	31.8	2