




FEATURES:

- Anti-static Devices For Ball- Stem- Body
- Blow-out Proof Stem
- Pressure Balance Hole In Ball Slot
- Built In Iso 5211 Direct Mounting Pad For Easy Automation

STANDARDS:

- Design: ASME B16.34
- Wall Thickness: ASME B16.34
- Fire Safe: API 607 ISO 10497
- Face to Face: JIS B2002
- End Flange: JIS B2220
- Inspection & Testing: JIS B2003

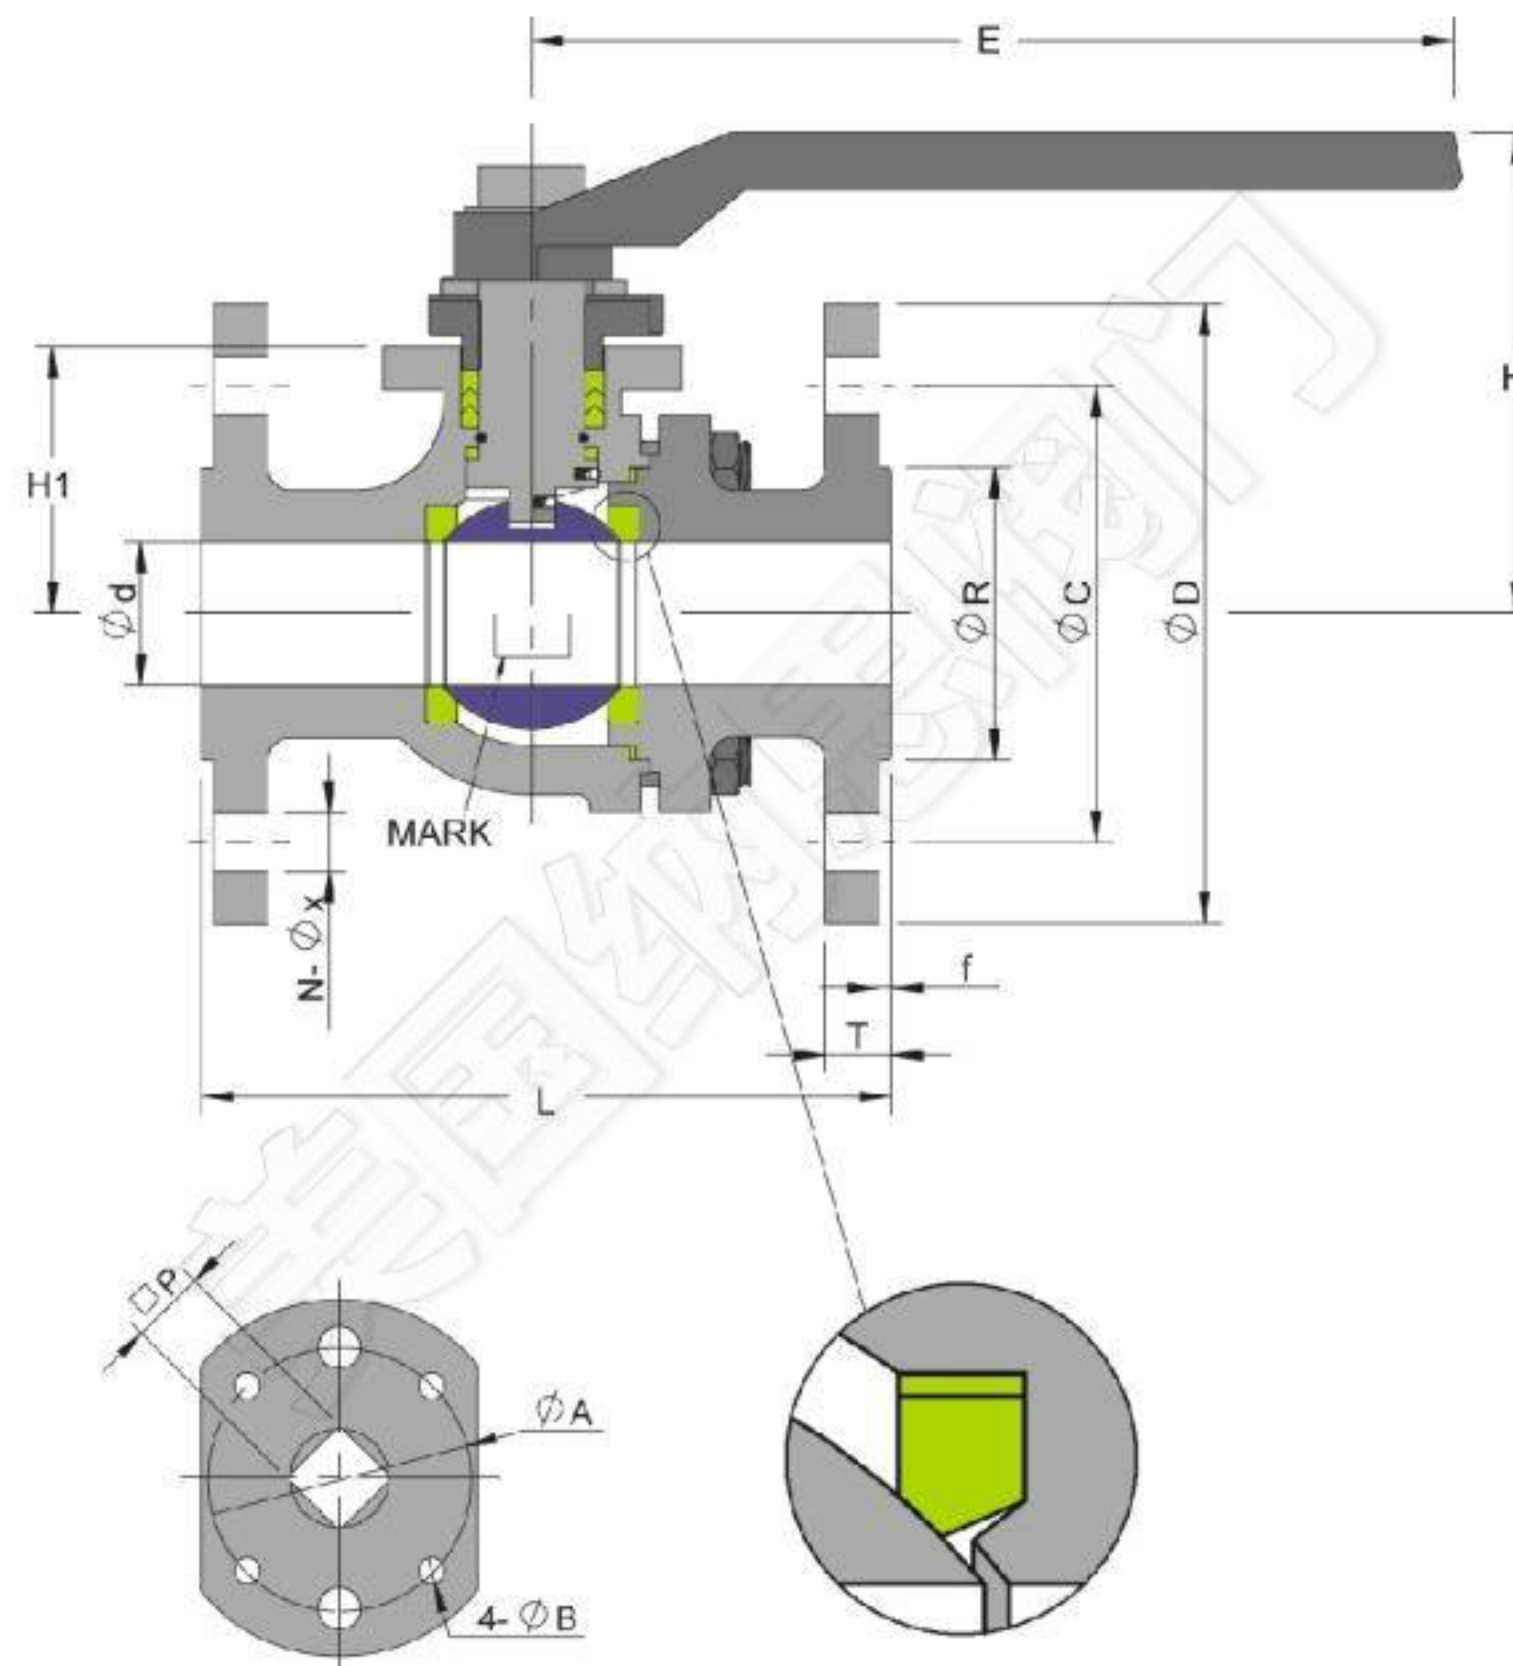

ISO-5211 Mounting Pad

Fire Safe Design

Unit:mm ■ JIS 10K

Size	Pressure	L	Ød	ØR	ØC	ØD	H	H1	E	f	T	N	ØX	□P	ØA	ØB	ISO-5211
1/2"	10K	108	15	51	70	95	77.5	34	150	1	12	4	15	11	42	4	F4
3/4"	10K	117	20	56	75	100	79	35.5	150	1	14	4	15	11	42	4	F4
1"	10K	127	25	67	90	125	88	45	150	1	14	4	19	11	42	4	F4
1-1/4"	10K	140	32	76	100	135	100	50	170	2	16	4	19	14	50	5	F5
1-1/2"	10K	165	38	81	105	140	122	60	230	2	16	4	19	17	70	6.5	F7
2"	10K	178	50	96	120	155	130	68	230	2	16	4	19	17	70	6.5	F7
2-1/2"	10K	190	65	116	140	175	148	86	230	2	18	4	19	17	70	6.5	F7
3"	10K	203	78	126	150	185	167	96	305	2	18	8	19	22	102	8.5	F10
4"	10K	229	100	151	175	210	188	117	305	2	18	8	19	22	102	8.5	F10
5"	10K	356	125	182	210	250	246	141	500	2	20	8	23	22	125	10.5	F12
6"	10K	394	150	212	240	280	288	172	645	2	22	8	23	27	125	10.5	F12
8"	10K	457	200	262	290	330	329	213	845	2	22	12	23	27	125	10.5	F12
10"	10K	533	250	324	355	400	396	255	1335	2	24	12	25	36	140	14	F14